


zenith

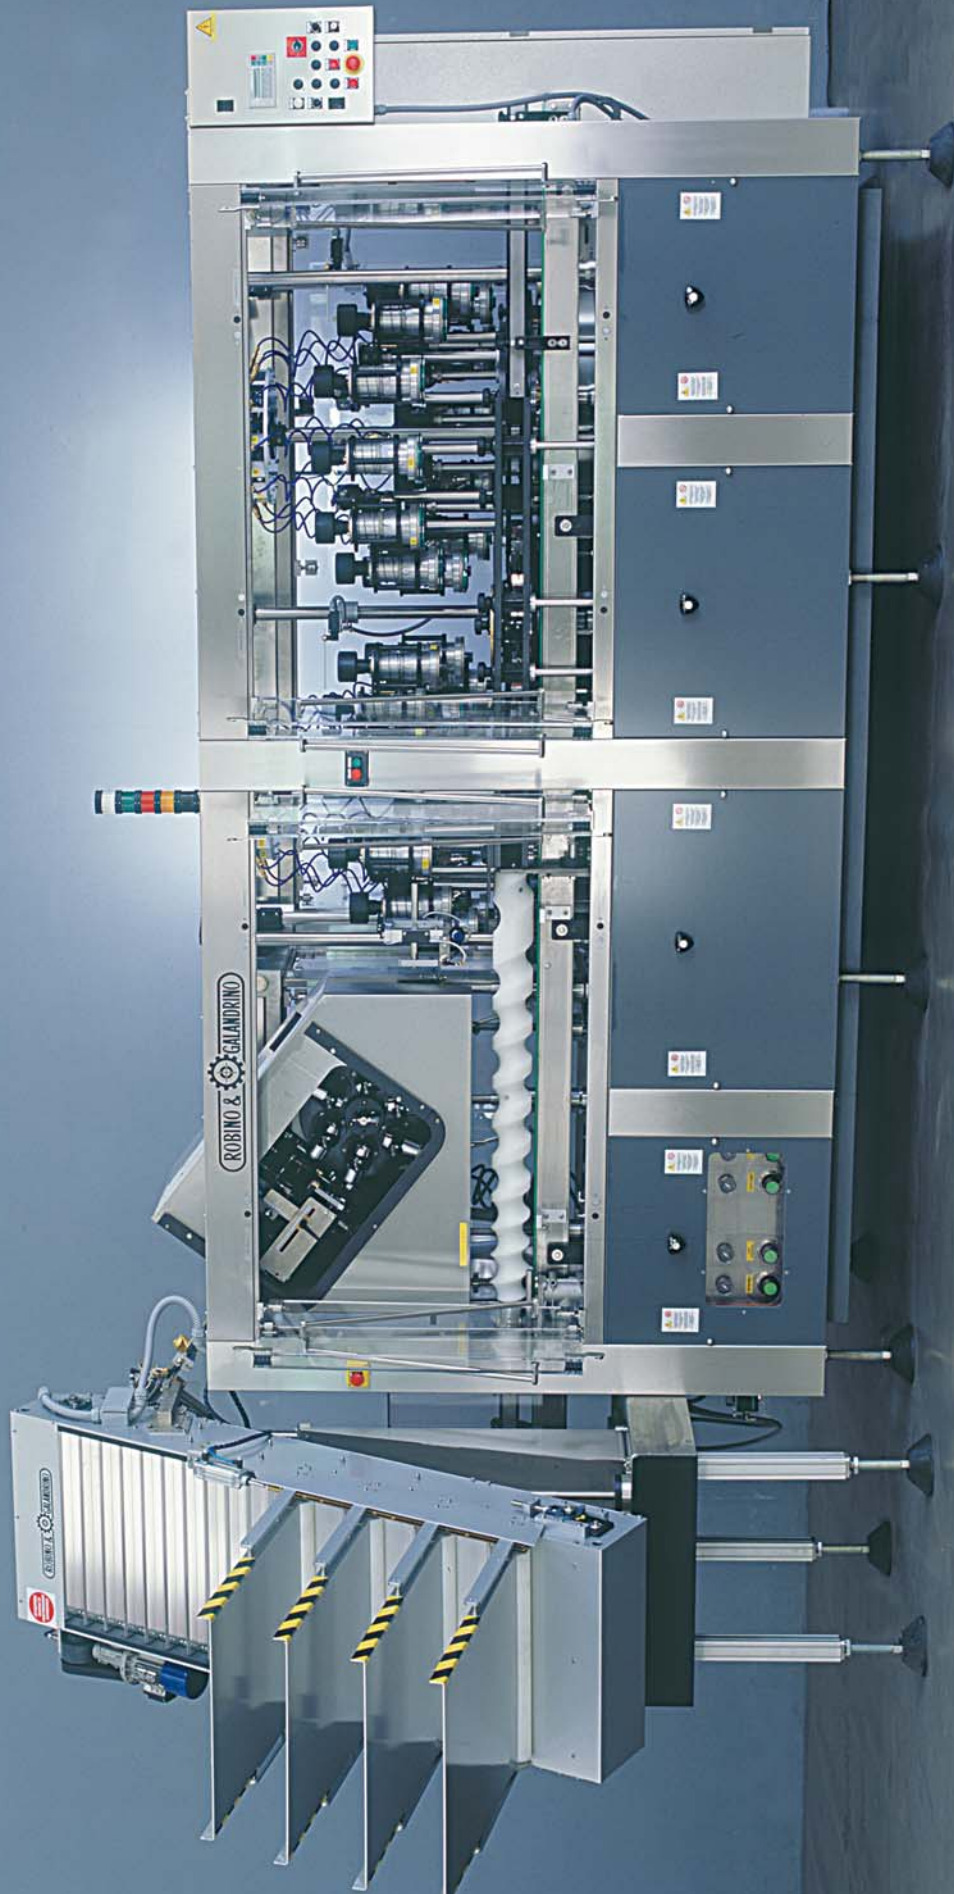

CAPSULING MONOBLOC FOR THE DISTRIBUTION AND APPLICATION OF SPARKLING WINE CAPSULES

Distributor and capsuling monoblock comprised of a frame manufactured of electrowelded steel and covered by stainless steel

The machine is complete with:

- automatic capsule distributor with single or multi-bell elliptical oscillating movement to transport the capsule from the magazine to the bottle guaranteeing precise and reliable positioning.
- the sparkling wine capsules are mechanically extracted from the magazine before entering the bell.
- one (1) rotary carousel complete with pneumatic heads for forming the (4) pleats.

heads for forming the (4) pleats.

- one (1) transfer starwheel between the first and the second carousel, complete with locking pincers to stabilize the bottles guaranteeing the perfect crimping of the capsule in the final application .
 - one (1) rotary carousel complete with pneumatic heads for the final crimping of the capsule.
 - centralized control panel complete with variable speed inverter and PLC
 - electronic system for the control of bottle flow at the infeed and exit of the machine with automatic start and stop in the event of a lack of bottles at the infeed or bottles jamming at the exit.
 - safety guards in compliance with CE standards.
- Air consumption (6 bar): 6 litres/sec for all models.

Model	b/h	A	B	C	D	Power KW
Zenith 2/6	3000	2170	820	2260	810	1,15
Zenith 2/8	4500	2600	860	2930	950	1,3
Zenith 2/12	6000	3350	1145	3500	950	1,55
Zenith 2/16	9000	3700	1265	3895	950	2,35
Zenith 2/24	12000	4050	1525	4010	950	2,85
Zenith 2/32	21000	4150	1920	4100	1120	3,85

